

# Arizon AZ-AMR84 Impinj M830

P-01046-R9N4J0-202509082232598793

## Overview

### Operating frequency

US 902-928 MHz

### Air interface protocol

EPC Class 1 Gen 2 ISO 18000-63

### IC

Impinj M800 Series

### Thickness

1.15 mm

### Industry Segments

IT Services; Manufacturing; Automotive; Aviation

### Applications

Supply Chain Management; Inventory and Logistics; Asset Management; Returnable Transport Items (RTI)

### RoHS

EU Directive 2011/65/EC and Directive (EU) 2015/863

### REACH

Regulation (EC) No 1907/2006



## AZ-AMR84 FCC Mount-on-Metal Label

AZ-AMR84 is an on-metal label that can be attached to metallic assets. Its flexible design makes it ideal for irregular and uneven surfaces. The product can be printed and encoded with industrial RFID printers.


## Technical features

IC	Impinj M830
EPC and User Memory	Please refer to the IC Options table
TID Memory	Please refer to the IC Options table
Inlay Substrate	PET
Product Type	Mount on Metal
Die Cut Dimensions	6 x 64 mm
Face Sheet	Polyethylene
Pitch	25.400
Web Width	68.000
Label Orientation	WEL
Adhesive	
Core Size	76.20 mm
Quantity / Reel	800
Reel outer diameter	Max. 240.00 mm
Service Temperature	-20°C to +50°C



## Tag IC options

	M730	M750	M770	M775	M780	M781
	M830	M850				
<b>EPC memory (bit)</b>	128	96	128	128	496	128
<b>User memory (bit)</b>	0	32	32	32	128	512
<b>TID (bit)</b>	48	48	48	48	48	48
<b>Unique TID (bit)</b>	48	48	48	48	48	48
<b>Read sensitivity (-dBm)</b>	24	24	24	24	23.5	23.5

## Orientation sensitivity

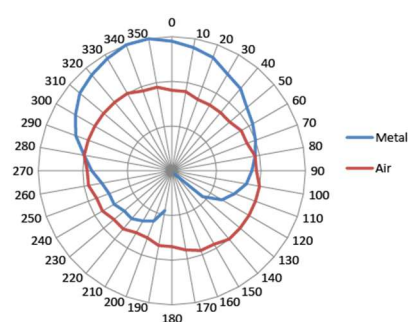

## Read range

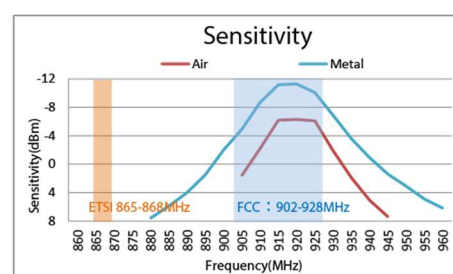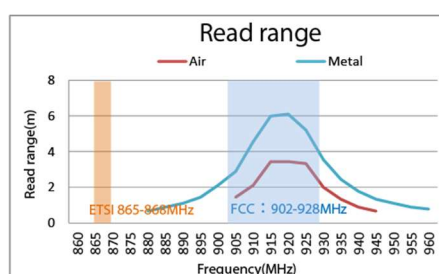

## Contact information

[rfid.supplies/shop](https://rfid.supplies/shop)

[sales@rfid.supplies](mailto:sales@rfid.supplies)

+44 20 203 8080 2050



© 2023 syo.io and rfid.supplies. All graphs are indicative: performance in real life applications may vary. Third party trademarks and/or trade names used herein are the property of their respective owner(s). Some of the trademarks appear for identification purposes only.

Warranty: Please refer to rfid.supplies standard terms and conditions: [https://rfid.supplies/gtc\\_of\\_sale](https://rfid.supplies/gtc_of_sale)

Care and handling: RFID inlays are sensitive to ESD. Observe standard industry practices relating to electronics and RFID to keep environmental impact and static charge to a minimum.

Applications: This product should be tested by the customer / user thoroughly under end use conditions to ensure the product meets the requirements. rfid.supplies does not represent that this product is fit for any particular purpose or use. rfid.supplies reserves the right to modify, change, supplement or discontinue product offerings at any time without notice. The information contained herein is believed to be reliable, but rfid.supplies makes no representation concerning the accuracy or correctness of the data