

# Perfect ID P15A Impinj Monza R6-P

P-01028-Z9K8M8 - PID-PEARL-P15A

## Overview

### Operating frequency

Global 860-960 MHz

### Air interface protocol

EPC Class 1 Gen 2 ISO 18000-63

### IC

Impinj M700 Series

### Industry Segments

Apparel; Retail

### Applications

Supply Chain Management; Inventory and Logistics

### RoHS

EU Directive 2011/65/EC and Directive (EU) 2015/863

### REACH

Regulation (EC) No 1907/2006




## PEARL Jewellery Label

Pearl provides excellent performance for jewellery management and small-sized asset tracking. The tag is an ideal choice for EAS and shrink management.


## Technical features

<b>IC</b>	Impinj Monza R6-P
<b>EPC and User Memory</b>	128bit EPC Memory, 0bit User Memory
<b>TID Memory</b>	96bit serialised TID, 48bit unique serial number
<b>Product Type</b>	White Wet, PP Face
<b>Die Cut Dimensions</b>	12 x 102 mm
<b>Face Sheet</b>	BOPP
<b>Pitch</b>	28.331
<b>Web Width</b>	111.000
<b>Label Orientation</b>	WEL
<b>Adhesive</b>	Acrylic
<b>Core Size</b>	76.20 mm
<b>Quantity / Reel</b>	5,000
<b>Reel outer diameter</b>	Max. 203.20 mm
<b>Service Temperature</b>	-40°C to +85°C

## Technical Drawing

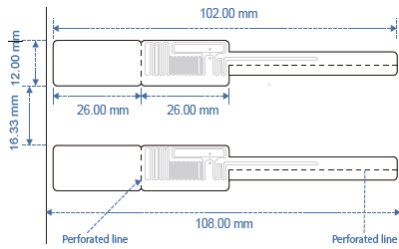

## Read range

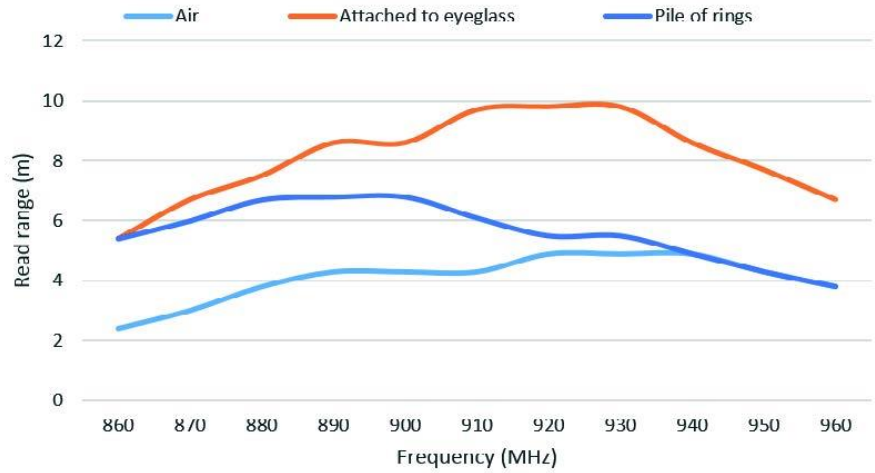

## Contact information

[rfid.supplies/shop](https://rfid.supplies/shop)

[sales@rfid.supplies](mailto:sales@rfid.supplies)

+44 20 203 8080 2050



© 2023 syo.io and rfid.supplies. All graphs are indicative: performance in real life applications may vary. Third party trademarks and/or trade names used herein are the property of their respective owner(s). Some of the trademarks appear for identification purposes only.

Warranty: Please refer to rfid.supplies standard terms and conditions: [https://rfid.supplies/gtc\\_of\\_sale](https://rfid.supplies/gtc_of_sale)

Care and handling: RFID inlays are sensitive to ESD. Observe standard industry practices relating to electronics and RFID to keep environmental impact and static charge to a minimum.

Applications: This product should be tested by the customer / user thoroughly under end use conditions to ensure the product meets the requirements. rfid.supplies does not represent that this product is fit for any particular purpose or use. rfid.supplies reserves the right to modify, change, supplement or discontinue product offerings at any time without notice. The information contained herein is believed to be reliable, but rfid.supplies makes no representation concerning the accuracy or correctness of the data