

# Perfect ID UNI4415 Impinj M730

P-01005-C3F8S9 - RFMO-240209-ETSI

#### Overview

Operating frequency

EU 865-868 MHz

Air interface protocol

EPC Class 1 Gen 2 ISO 18000-63

IC

Impinj M700 Series

**Industry Segments** 

Logistics; IT Services; Manufacturing

**Applications** 

Supply Chain Management; Inventory and Logistics; Asset Management

RoHS

EU Directive 2011/65/EC and Directive (EU) 2015/863

**REACH** 

Regulation (EC) No 1907/2006



#### UNI4415 Mount-on-Metal Label EU M730


UNI4415 tag is a flexible label that can be attached to metallic assets. Its flexible design makes it ideal for irregular and uneven surfaces. The product can be printed and encoded with industrial RFID printers.

#### Technical features


IC	Impinj M730
EPC and User Memory	128bit EPC Memory, 0bit User Memory
TID Memory	96bit serialised TID, 48bit unique serial number
Product Type	Mount on Metal
Die Cut Dimensions	15 x 44 mm
Face Sheet	Synthetic Polyester
Pitch	30.000
Web Width	50.000
Label Orientation	WEL
Adhesive	Acrylic
Core Size	76.20 mm
Quantity / Reel	500
Reel outer diameter	Max. 200.00 mm
Service Temperature	-20°C to +80°C
•	



## **Technical Drawing**



## Read range

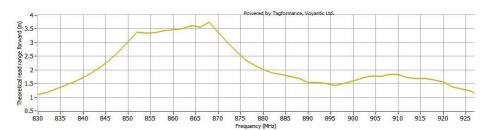



### Contact information

rfid.supplies/shop

sales@rfid.supplies

+44 20 203 8080 2050





© 2023 syo.io and rfid.supplies. All graphs are indicative: performance in real life applications may vary. Third party trademarks and/or trade names used herein are the property of their respective owner(s). Some of the trademarks appear for identification purposes only.

 $Warranty: Please\ refer\ to\ rfid. supplies\ standard\ terms\ and\ conditions:\ https://rfid. supplies/gtc\_of\_sale$ 

Care and handling: RFID inlays are sensitive to ESD. Observe standard industry practices relating to electronics and RFID to keep environmental impact and static charge to a minimum.

Applications: This product should be tested by the customer / user thoroughly under end use conditions to ensure the product meets the requirements. rfid.supplies does not represent that this product is fit for any particular purpose or use. rfid.supplies reserves the right to modify, change, supplement or discontinue product offerings at any time without notice. The information contained herein is believed to be reliable, but rfid.supplies makes no representation concerning the accuracy or correctness of the data